



YINGYAO
盈耀电光源

盈耀



Mark

Mob/WhatsApp:+86-15267818818

Wechat:mmm449176

E-mail:service@yingyao.cn

Sabrina

Mob/WhatsApp:+86-13858239916

Wechat:yinglinhua

E-mail:service3@yingyao.cn



Energy saving and Environmental protection

Innovation and High efficiency

Ningbo · China

Street light series



unique swords design and excellent heat sink
 excellent average illumination and perfect 120° beam angle
 with COB LED excellent light distribution
 IP grade: IP65
 input voltage: 85~265V / 50~60Hz
 power factor: >0.95
 power efficiency: >88%
 lighting efficiency: 95~110Lm/W
 colour temperature: 3000K/4500K/6000K
 Ra: >80
 working environment: -30°C ~ 45°C
 warranty: 2-5 years

Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYS-01-20W	20W	1	1.3	0.8	36.5 × 16.5 × 11.0
YYS-01-30W	30W	1	1.6	1.1	42.0 × 18.5 × 11.5
YYS-01-50W	50W	1	2.2	1.9	50.5 × 23.5 × 10.5
YYS-01-100W	100W	1	5.1	4.5	73.0 × 29.5 × 13.0
YYS-01-150W	150W	1	7.5	7.0	90.5 × 35.0 × 13.5
YYS-01-200W	200W	1	12.5	11.9	115.0 × 42.5 × 12.5

unique tennis racket design and excellent heat sink
 excellent average illumination and perfect 120° beam angle
 with COB LED excellent light distribution
 IP grade: IP65
 input voltage: 85~265V / 50~60Hz
 power factor: >0.95
 power efficiency: >88%
 lighting efficiency: 95~110Lm/W
 colour temperature: 3000K/4500K/6000K
 Ra: >80
 working environment: -30°C ~ 45°C
 warranty: 2-5 years

Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYS-02-50W	50W	1	4.0	3.0	54.0 × 26.5 × 15.0
YYS-02-100W	100W	1	5.2	4.2	68.0 × 27.0 × 15.0
YYS-02-150W	150W	1	7.9	6.9	81.5 × 32.0 × 16.5

Street light series



unique practical design and excellent heat sink
 excellent average illumination and perfect 120° beam angle
 with SMD LED excellent light distribution
 IP grade: IP65
 input voltage: 85–265V / 50–60HZ
 power factor: >0.95
 power efficiency: >88%
 lighting efficiency: 95–110LM/W
 colour temperature: 3000K/4500K/6000K
 Ra: >80
 working environment: –30°C – 45°C
 warranty: 2–3 years

Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYS-03-50W	50W	2	5.2	4.8	52.0 × 23.5 × 13.0
YYS-03-100W	100W	2	8.4	7.9	62.0 × 29.0 × 14.5
YYS-03-150W	150W	2	11.0	10.4	71.5 × 35.5 × 15.0
YYS-03-200W	200W	2	13.5	12.6	81.5 × 33.0 × 15.5



Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYS-04-50W	50W	1	3.6	3.1	24.0 × 26.5 × 12.0
YYS-04-100W	100W	1	5.0	4.5	63.5 × 28.0 × 12.0
YYS-04-150W	150W	1	7.5	7.0	72.0 × 31.5 × 13.0



Street light series



unique integrated design of driver box & arm and excellent heat sink
excellent average illumination and perfect 120° beam angle

with SMD LED excellent light distribution

IP grade: IP67

anti-level 17 hurricane

input voltage: 85–265V / 50–60HZ

power factor: >0.97

power efficiency: >88%

lighting efficiency: 120–130LM/W



colour temperature: 3000K/4500K/6000K

Ra: >80


working environment: –30°C – 45°C

warranty: 5 years

Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYS-05-30W	30W	1	1.9	1.4	39.0 × 14.8 × 10.5
YYS-05-40W	40W	1	2.0	1.5	39.0 × 14.8 × 13.5
YYS-05-60W	60W	1	2.4	1.9	44.5 × 17.8 × 14.0
YYS-05-90W	90W	1	3.7	3.2	44.5 × 18.0 × 14.0
YYS-05-120W	120W	1	3.7	3.2	65.0 × 23.0 × 14.0
YYS-05-150W	150W	1	5.4	4.9	65.0 × 23.0 × 14.0

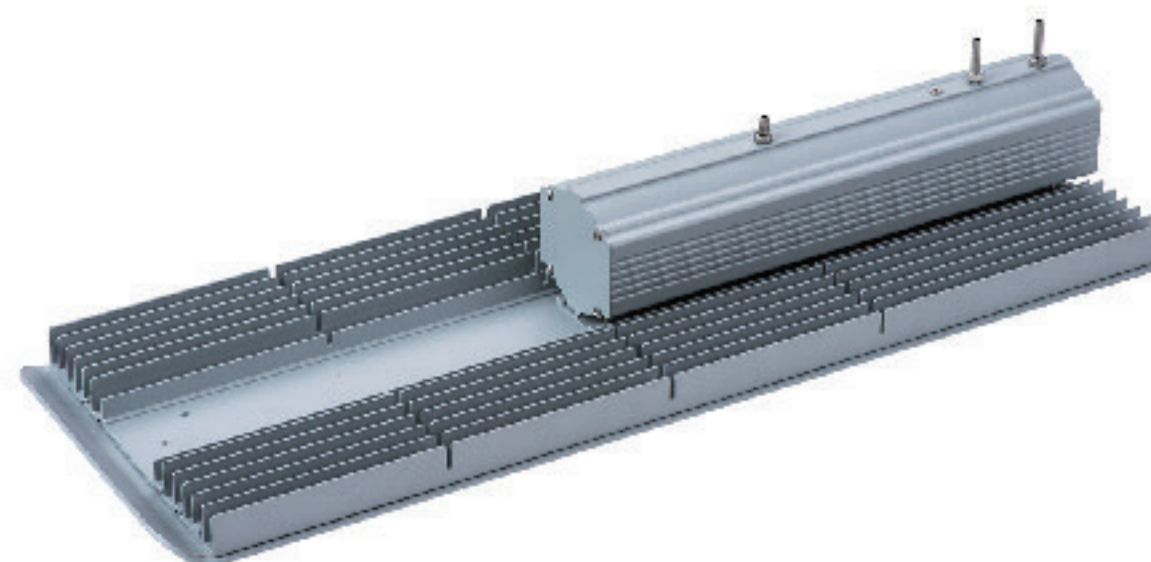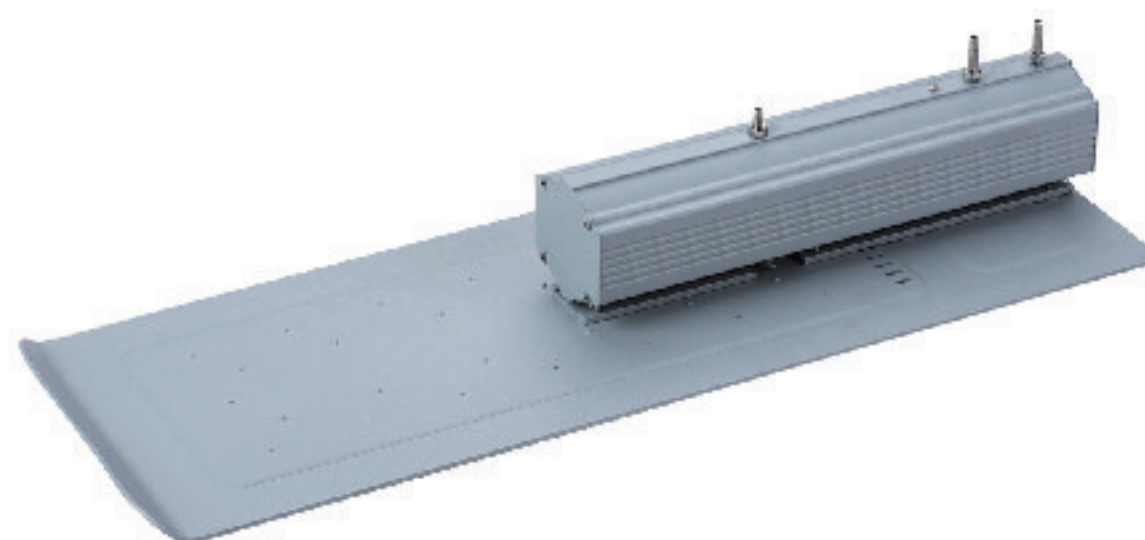

Street light series

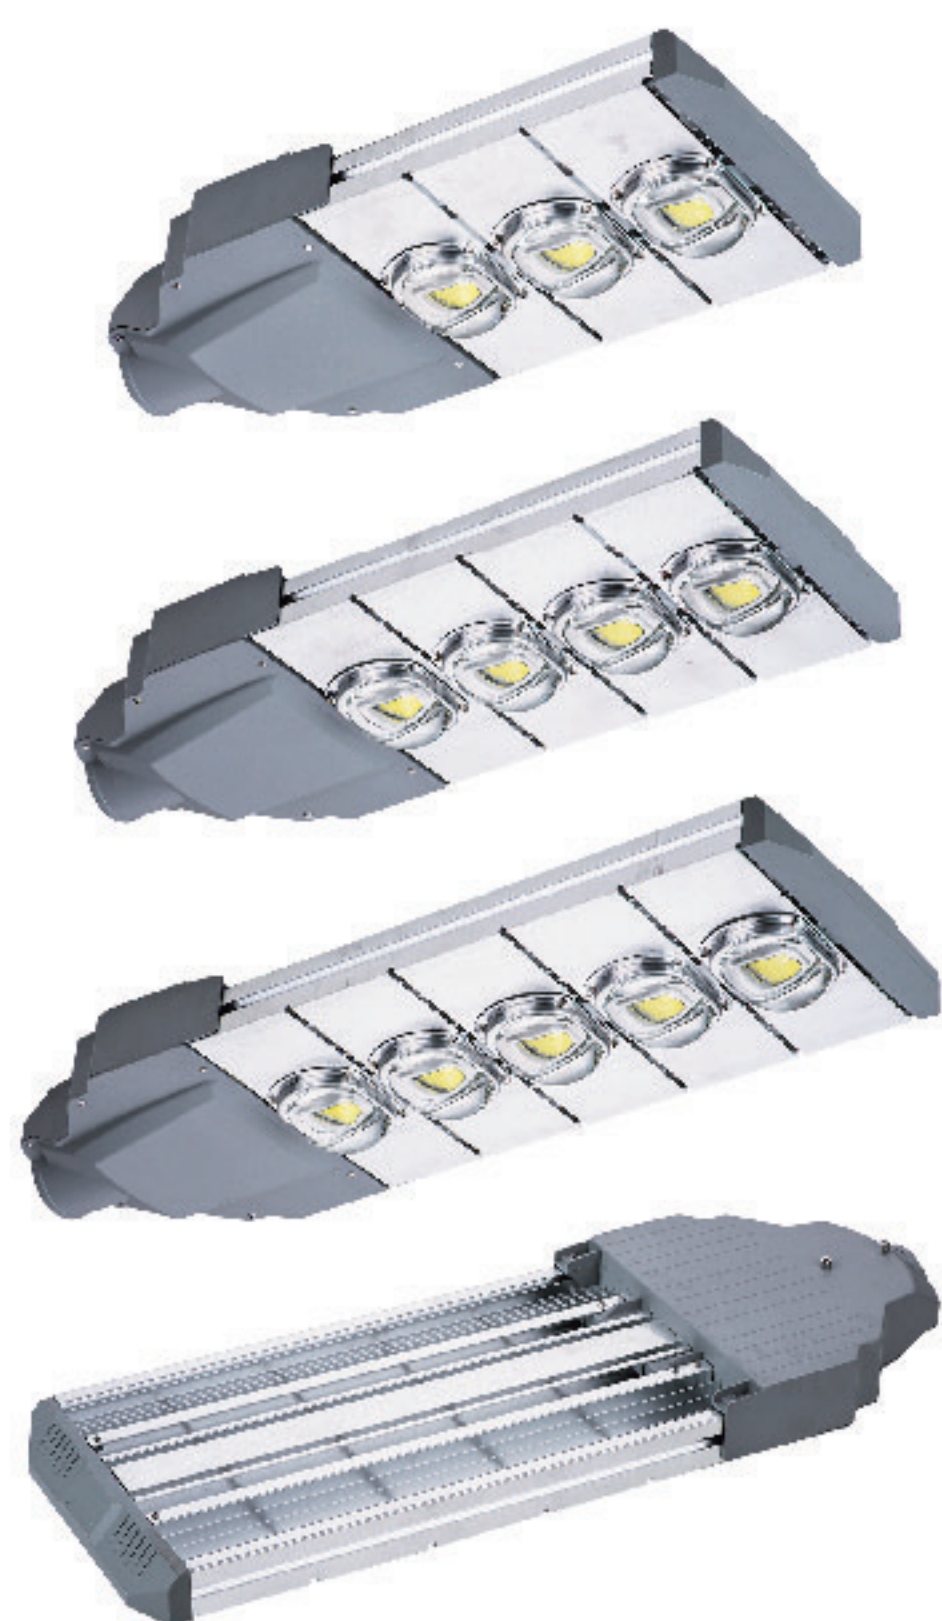

unique building block design and excellent heat sink
 excellent average illumination and perfect 120° beam angle
 with COB LED excellent light distribution
 IP grade: IP65
 input voltage: 85–265V / 50–60HZ
 power factor: >0.95
 power efficiency: >88%
 lighting efficiency: 95–110LM/W
 colour temperature: 3000K/4500K/6000K
 Ra: >80
 working environment: –30°C – 45°C
 warranty: 2–5 years

Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYS-06-100W	100W	1	6.0	5.5	60.0 × 32.0 × 13.5
YYS-06-150W	150W	1	7.6	7.1	70.5 × 32.0 × 13.5
YYS-06-200W	200W	1	9.2	8.7	81.0 × 32.0 × 13.5
YYS-06-250W	250W	1	10.8	10.3	92.0 × 32.0 × 13.5



unique philips design and excellent heat sink
 excellent average illumination and perfect 120° beam angle
 with SMD LED excellent light distribution
 IP grade: IP67
 input voltage: 85–265V / 50–60HZ
 power factor: >0.95
 power efficiency: >88%
 lighting efficiency: 110–130LM/W
 colour temperature: 4000K/5000K/6000K
 Ra: >80
 working environment: –30°C – 45°C
 warranty: 3–5 years

Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYS-07-100W	100W	1	5.0	4.5	57.5 × 36.5 × 13.5
YYS-07-150W	150W	1	6.1	5.6	65.5 × 36.5 × 13.5
YYS-07-200W	200W	1	7.0	6.5	73.5 × 36.5 × 13.5
YYS-07-250W	250W	1	8.2	7.7	81.5 × 36.5 × 13.5

Solar Street light series



Model number	YYR-01-60W	YYR-01-90W	YYR-01-120W
Lamp size	1130 × 550 × 95mm	1430 × 550 × 95mm	2040 × 550 × 95mm
LED Lamp	60W	90W	120W
Solar Panel	18V 80W	18V 120W	18V 160W
Battery Type	12V 480WH	12V 720WH	12V 960WH
Charging time	6-8 hours(with strong enough sunshine)		
Discharging time	>48 hours (Continuous rainy days:3-5 days)		
Lumen	6000 lm	9000 lm	12000 lm
Meterial	Aluminum Alloy		
Install Height	6-9 m		
Warranty	3-5 years		

Flood light series



unique housing design and excellent heat sink
beam angle of reflector is 120°
with COB LED excellent light distribution
IP grade: IP65
input voltage: 85–265V / 50–60HZ
power factor: >0.95
power efficiency: >88%
lighting efficiency: 95–110LM/W
colour temperature: 3000K/4500K/6000K
Ra: >80
working environment: –30°C – 45°C
warranty: 2–3 years



Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYF-01-30W	30W	20	21.0	20.5	51.5 × 43.5 × 23.0
YYF-01-50W	50W	10	16.5	16.0	50.0 × 32.5 × 27.5
YYF-01-100W	100W	4	16.5	16.0	38.3 × 35.5 × 34.5
YYF-01-150W	150W	4	22.5	22.0	40.0 × 39.5 × 40.5



Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYF-02-20W	20W	10	10.3	9.3	34.5 × 32.5 × 21.5
YYF-02-30W	30W	10	15.0	14.0	40.5 × 41.0 × 25.5
YYF-02-50W	50W	8	18.0	17.0	36.0 × 50.0 × 31.0
YYF-02-100W	100W	4	18.5	17.5	42.5 × 33.0 × 39.5

Flood light series



Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYF-03-20W	20W	10	8.5	7.5	32.0 × 31.0 × 21.3
YYF-03-30W	30W	10	13.0	11.5	34.5 × 39.7 × 25.5
YYF-03-50W	50W	10	21.0	19.5	38.0 × 50.0 × 31.5
YYF-03-100W	100W	8	19.5	19.0	59.5 × 31.5 × 40.0



Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYF-04-10W	10W	50	15.5	15.0	48.5 × 25.0 × 28.5
YYF-04-20W	20W	30	19.0	18.0	46.0 × 27.5 × 42.5
YYF-04-30W	30W	20	19.0	18.0	40.0 × 26.0 × 52.0
YYF-04-50W	50W	15	21.5	20.5	74.5 × 32.5 × 35.0
YYF-04-100W	100W	10	21.5	20.5	60.0 × 35.5 × 40.5

Flood light series



unique housing design and excellent heat sink

beam angle of reflector is 120°

with COB/SMD LED excellent light distribution

IP grade: IP66

input voltage: 85–265V / 50–60HZ

power factor: >0.95

power efficiency: >88%

lighting efficiency: 95–110LM/W

colour temperature: 3000K/4500K/6000K

Ra: >80

working environment: –30°C – 45°C

warranty: 2–3 years

Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYF-05-10W	10W	40	19.5	18.5	53.0 × 25.0 × 33.5
YYF-05-20W	20W	20	16.8	15.8	40.5 × 28.0 × 34.0
YYF-05-30W	30W	15	20.2	19.2	65.5 × 53.5 × 31.5
YYF-05-50W	50W	8	16.5	15.5	68.5 × 53.5 × 31.5
YYF-05-100W	100W	4	16.1	15.1	35.5 × 35.5 × 38.0
YYF-05-150W	150W	4	22.8	21.8	43.0 × 39.5 × 36.5

Flood light series



unique housing design and excellent heat sink
beam angle of reflector is 120°
with COB LED excellent light distribution
IP grade: IP65
input voltage: 85~265V / 50~60Hz
power factor: >0.95
power efficiency: >88%
lighting efficiency: 95~110Lm/W
colour temperature: 3000K/4500K/6000K
Ra: >80
working environment: -30°C ~ 45°C
warranty: 2-3 years

Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYF-06-30W	30W	8	11.0	10.0	60.5 × 25.5 × 39.0
YYF-06-50W	50W	8	14.5	13.0	64.5 × 30.5 × 46.0
YYF-06-100W	100W	6	26.0	24.5	43.0 × 42.0 × 53.0



unique housing design and excellent heat sink
beam angle of reflector is 120°
with COB/SMD LED excellent light distribution
IP grade: IP65
input voltage: 85-265V / 50-60HZ
power factor: >0.95
power efficiency: >88%
lighting efficiency: 95-110LM/W
colour temperature: 3000K/4500K/6000K
Ra: >80
working environment: -30°C - 45°C
warranty: 2-3 years

Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYF-07-50W	50W	2	4.7	4.2	30.8 × 26.5 × 21.0
YYF-07-100W	100W	2	6.3	5.8	35.0 × 32.3 × 25.5
YYF-07-150W	150W	1	6.5	6.0	46.5 × 43.0 × 16.0

Flood light series



unique housing design and excellent heat sink

beam angle of reflector is 120°

with COB LED excellent light distribution

IP grade: IP65

input voltage: 85–265V / 50–60HZ

power factor: >0.95

power efficiency: >88%


lighting efficiency: 95–110LM/W

colour temperature: 3000K/4500K/6000K

Ra: >80

working environment: –30°C – 45°C

warranty: 2–3 years

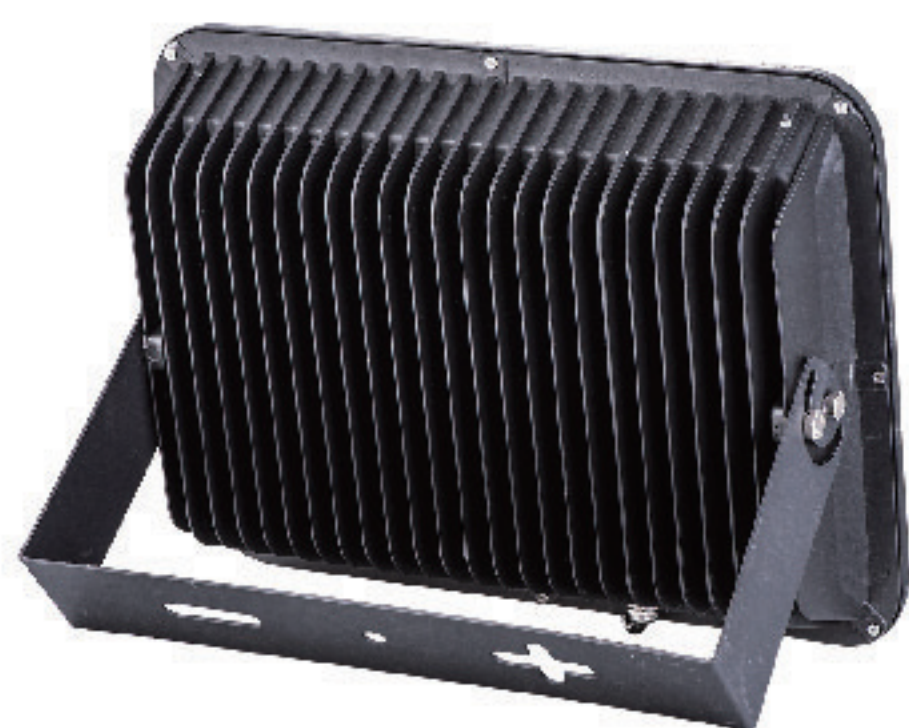

Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYF-08-50W	50W	8	20.1	19.1	52.0 × 27.0 × 33.0
YYF-08-100W	100W	6	17.8	16.8	53.0 × 29.0 × 36.0
YYF-08-150W	150W	3	18.6	17.6	35.0 × 34.0 × 45.0
YYF-08-200W	200W	3	19.2	18.2	35.0 × 34.0 × 45.0
YYF-08-300W	300W	1	9.0	8.5	55.0 × 36.5 × 14.0
YYF-08-400W	400W	1	10.8	10.3	64.5 × 38.5 × 12.5
YYF-08-500W	500W	1	14.6	14.1	85.5 × 38.5 × 13.5

Flood light series



unique housing design and excellent heat sink
beam angle of reflector is 120°
driver on board with SMD LED excellent light distribution
IP grade: IP65
input voltage: 180–260V / 50–60HZ
power factor: >0.93
lighting efficiency: 95–110LM/W
colour temperature: 3000K/4500K/6000K
Ra: >80
working environment: –30°C – 45°C
warranty: 2–3 years



Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYF-09-10W	10W	40	17.0	16.5	33.5 × 27.5 × 25.0
YYF-09-30W	30W	20	17.0	16.5	33.5 × 31.5 × 25.0
YYF-09-50W	50W	15	20.5	20.0	58.0 × 33.0 × 30.5
YYF-09-100W	100W	8	19.8	19.3	46.5 × 40.0 × 35.5
YYF-09-150W	150W	4	15.0	14.5	41.5 × 28.0 × 37.0

Flood light series



unique housing design and excellent heat sink
 beam angle of reflector is 120°
 driver on board with SMD LED excellent light distribution
 IP grade: IP65
 input voltage: 180–260V / 50–60HZ
 power factor: >0.93
 lighting efficiency: 95–110LM/W
 colour temperature: 3000K/4500K/6000K
 Ra: >80
 working environment: –30°C – 45°C
 warranty: 2–3 years



Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYF-10-15W	15W	40	15.0	14.0	31.0 × 22.0 × 22.0
YYF-10-30W	30W	30	17.5	16.5	42.0 × 39.5 × 21.0
YYF-10-60W	60W	15	17.6	16.6	59.5 × 28.5 × 28.5
YYF-10-100W	100W	8	18.5	17.5	54.0 × 27.5 × 38.0




unique housing design, slim and beautiful
 beam angle of reflector is 120°
 driver on board with SMD LED excellent light distribution
 IP grade: IP65
 input voltage: 180–260V / 50–60HZ
 power factor: >0.93
 lighting efficiency: 95–110LM/W
 colour temperature: 3000K/4500K/6000K
 Ra: >80
 working environment: –30°C – 45°C
 warranty: 2–3 years



Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYF-11-30W	30W	20	13.0	12.0	43.5 × 27.0 × 21.0
YYF-11-50W	50W	10	12.0	11.0	37.0 × 24.0 × 28.0
YYF-11-100W	100W	10	18.0	17.0	52.0 × 25.0 × 33.0
YYF-11-150W	150W	8	19.5	18.5	39.0 × 37.5 × 32.0

Flood light series

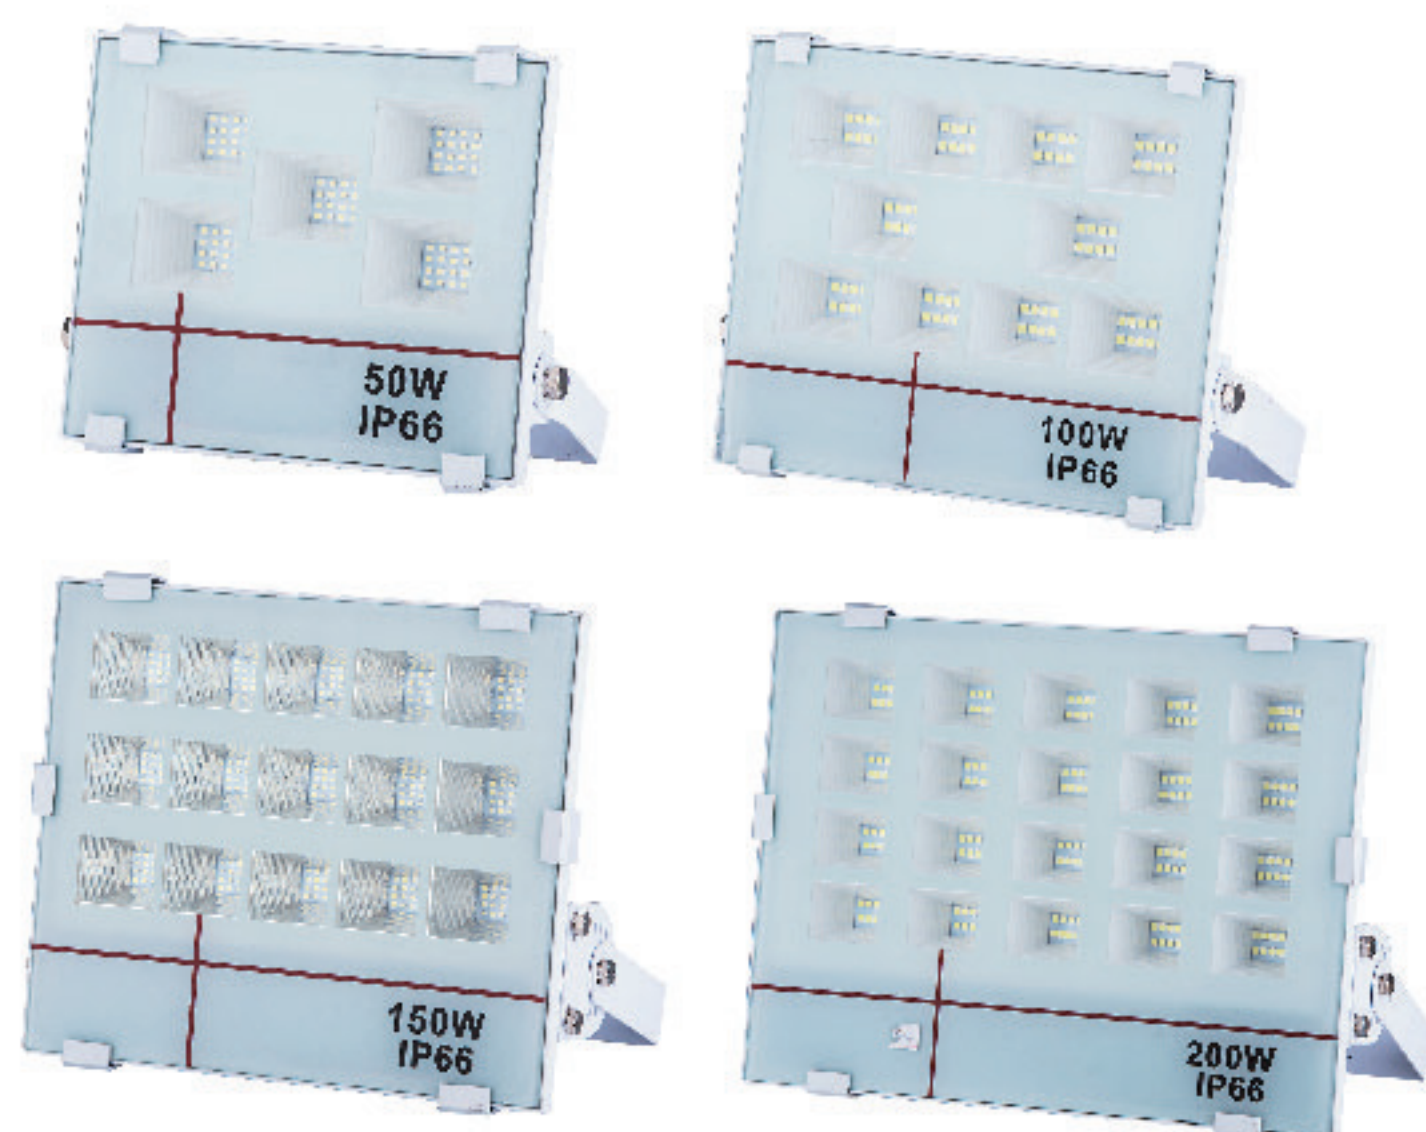

new clairvoyance design and excellent heat sink

beam angle of reflector is 120°

with SMD LED excellent light distribution

IP grade: IP65

input voltage: 85–265V / 50–60HZ

power factor: >0.95

power efficiency: >88%


lighting efficiency: 95–110LM/W

colour temperature: 3000K/4500K/6000K

Ra: >80

working environment: –30°C – 45°C

warranty: 2–3 years

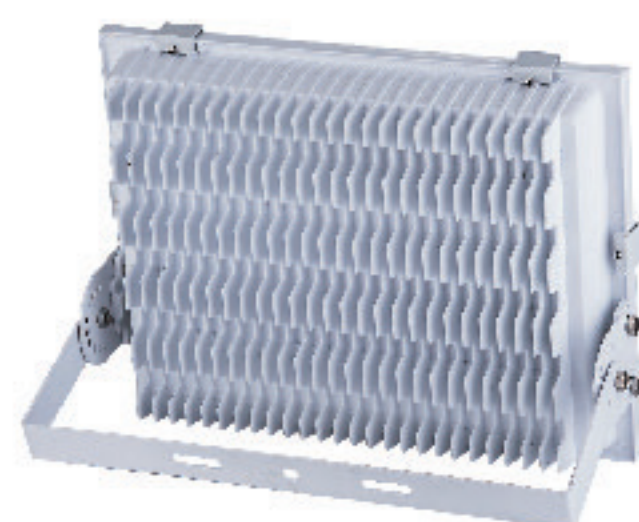

Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYF-12-50W	50W	10	16.0	15.0	44.0 × 40.5 × 27.0
YYF-12-100W	100W	6	16.3	15.3	56.5 × 28.0 × 32.5
YYF-12-150W	150W	4	18.3	17.3	49.0 × 34.5 × 38.5
YYF-12-200W	200W	2	13.0	12.0	38.5 × 23.0 × 47.0



unique housing design, slim and beautiful

beam angle of reflector is 120°

with COB LED excellent light distribution

IP grade: IP65

input voltage: 85–265V / 50–60HZ

power factor: >0.95

power efficiency: >88%

lighting efficiency: 85–100LM/W

colour temperature: 3000K/4500K/6000K

Ra: >80

working environment: –30°C – 45°C

warranty: 2–3 years



Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYF-13-30W	30W	20	10.0	9.0	38.5 × 37.0 × 23.0
YYF-13-50W	50W	20	12.0	11.0	43.5 × 38.5 × 27.5
YYF-13-100W	100W	10	15.5	14.5	41.5 × 30.0 × 46.0
YYF-13-150W	150W	10	15.0	16.5	41.5 × 30.0 × 46.0

Flood light series



unique housing design and various led type

beam angle of reflector is 120°

with COB/SMD LED excellent light distribution

IP grade: IP65

input voltage: 85-265V / 50-60HZ

power factor: >0.95

power efficiency: >88%


lighting efficiency: 95-110LM/W

colour temperature: 3000K/4500K/6000K

Ra: >80

working environment: -30°C - 45°C

warranty: 2-3 years

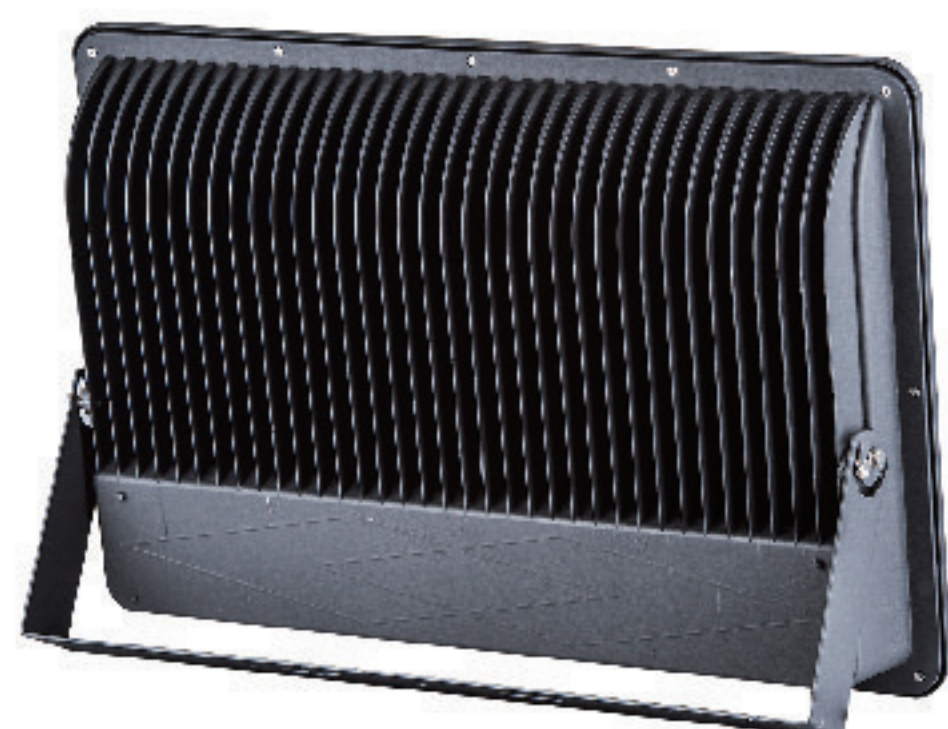

Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYF-14-100W	100W	1	4.5	4.0	37.0 × 30.0 × 12.5
YYF-14-200W	200W	1	6.8	6.3	46.5 × 34.0 × 14.5
YYF-14-300W	300W	1	8.8	8.3	46.0 × 41.0 × 13.5
YYF-14-400W	400W	1	12.0	11.5	47.5 × 47.0 × 13.5
YYF-14-500W	500W	1	12.6	12.1	58.0 × 47.0 × 13.5
YYF-14-600W	600W	1	16.7	16.2	70.0 × 51.0 × 13.5

Flood light series



unique housing design and various led type
 beam angle of reflector is 120°
 with COB/SMD LED excellent light distribution
 IP grade: IP65
 input voltage: 85–265V / 50–60HZ
 power factor: >0.95
 power efficiency: >88%
 lighting efficiency: 95–110LM/W
 colour temperature: 3000K/4500K/6000K
 Ra: >80
 working environment: –30℃ – 45℃
 warranty: 2–3 years

Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYF-15-150W	150W	1	7.5	7.0	44.0 × 34.0 × 20.0
YYF-15-200W	200W	1	8.0	7.5	47.0 × 34.0 × 20.0
YYF-15-250W	250W	1	9.3	8.8	54.0 × 34.0 × 21.5
YYF-15-300W	300W	1	11.0	10.5	57.5 × 34.0 × 21.5
YYF-15-400W	400W	1	13.0	12.5	68.5 × 34.0 × 21.5
YYF-15-500W	500W	1	16.5	16.0	82.0 × 34.0 × 21.5
YYF-15-600W	600W	1	20.5	20.0	98.5 × 34.0 × 21.5

High Bay light series



unique design and excellent ufo heat sink
beam angle of reflector is 120°
with SMD LED excellent light distribution
IP grade: IP65
input voltage: 85–265V / 50–60HZ
power factor: >0.95
power efficiency: >88%
lighting efficiency: 110–120LM/W
colour temperature: 3000K/4500K/6000K
Ra: >80
working environment: –30°C – 45°C
warranty: 3–5 years

Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYB-01-120W	120W	1	4.6	4.1	33.0 × 33.0 × 19.0
YYB-01-200W	200W	1	8.0	7.5	45.0 × 45.0 × 19.5



unique design and excellent sunflower heat sink
beam angle of reflector is 85°
with COB LED excellent light distribution
IP grade: IP65
input voltage: 85~265V / 50~60Hz
power factor: >0.95
power efficiency: >88%
lighting efficiency: 95~110Lm/W
colour temperature: 3000K/4500K/6000K
Ra: >80
working environment: –30°C ~ 45°C
warranty: 2 years

Model number	power	description	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYB-02-50W	50W	Heat sink	1	3.0	2.5	26.5 × 26.5 × 34.0
		Cover	20	6.5	5.5	44.5 × 44.5 × 35.0
YYB-02-100W	100W	Heat sink	1	4.0	3.5	24.5 × 24.5 × 35.5
		Cover	50	13.5	12.8	43.0 × 43.0 × 40.0
YYB-02-150W	150W	Heat sink	1	5.8	5.3	30.5 × 30.5 × 36.0
		Cover	50	17.0	16.5	51.5 × 51.5 × 43.0
YYB-02-200W	200W	Heat sink	1	6.8	6.3	30.5 × 30.5 × 36.0
		Cover	50	17.0	16.5	51.5 × 51.5 × 43.0

High Bay light series



unique housing design and excellent heat sink

the high purity copper heat pipe contacts directly with the heat source

the heat transfer rate over 200 times of the aluminum radiator

beam angle of reflector can be 60° /90° /110°

with SMD LED excellent light distribution

the lampshade is rotated clockwise to fix the buckle

IP grade: IP65

input voltage: 85–265V / 50–60HZ

power factor: >0.97

power efficiency: >88%

lighting efficiency: 120–130LM/W

colour temperature: 3000K/4500K/6000K

Ra: >80

working environment: –30°C – 45°C

warranty: 5 years

Model number	power	description	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYB-03-60W	60W	Heat sink	4	10.0	9.5	54.5 × 54.5 × 23.0
		Cover	8	2.9	2.4	35.0 × 35.0 × 18.0
YYB-03-100W	100W	Heat sink	4	11.3	10.8	54.5 × 54.5 × 25.0
		Cover	8	2.9	2.4	35.0 × 35.0 × 18.0
YYB-03-150W	150W	Heat sink	4	15.0	14.5	54.5 × 54.5 × 28.0
		Cover	8	2.9	2.4	35.0 × 35.0 × 18.0
YYB-03-200W	200W	Heat sink	4	19.8	19.3	54.5 × 54.5 × 33.0
		Cover	8	2.9	2.4	35.0 × 35.0 × 18.0

High Bay light series



unique die-casting aluminum design and various led type
 beam angle of reflector is 60°
 with COB/SMD LED excellent light distribution
 IP grade: IP65
 input voltage: 85–265V / 50–60HZ
 power factor: >0.95
 power efficiency: >88%
 lighting efficiency: 95–110LM/W
 colour temperature: 3000K/4500K/6000K
 Ra: >80
 working environment: –30°C – 45°C
 warranty: 2–3 years

Model number	power	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYB-04-150W	150W	1	5.5	5.0	32.5 × 32.5 × 26.0
YYB-04-200W	200W	1	7.0	6.5	36.5 × 36.5 × 27.5
YYB-04-250W	250W	1	8.5	8.0	41.5 × 41.5 × 27.5



fashionable and modern design, die-casting aluminum
 housing and high lumen efficiency
 beam angle of reflector is 60° /90° /120°
 with COB/SMD LED excellent light distribution
 IP grade: IP65
 input voltage: 85–265V / 50–60HZ
 power factor: >0.95
 power efficiency: >88%
 lighting efficiency: 100–130LM/W
 colour temperature: 3000K/4500K/6000K
 Ra: >80
 working environment: –30°C – 45°C
 warranty: 2–3 years

Model number	power	description	pc/ctn	G.W. (kgs)	N.W. (kgs)	carton dimension (cm)
YYB-05-50W	50W	Heat sink	4	4.5	4.0	46.5 × 24.0 × 29.0
		Cover	20	6.5	6.0	36.5 × 36.5 × 17.0
YYB-05-100W	100W	Heat sink	1	5.0	4.5	28.5 × 28.5 × 23.0
		Cover	20	12.2	11.7	48.0 × 48.0 × 36.5
YYB-05-150W	150W	Heat sink	1	6.0	5.5	28.5 × 28.5 × 23.0
		Cover	20	12.2	11.7	48.0 × 48.0 × 36.5



YINGYAO

盈 耀 电 光 源

宁波盈耀电光源有限公司

Ningbo Yingyao Lighting Co.,Ltd.

地址：中国浙江省宁波市奉化江口街道聚银路 18 号

Add: NO.18 JUYIN ROAD, JIANGKOU STREET, FENGHUA,
NINGBO, CHINA

Tel: 86-574-88848999 / 88848668

FAX: 86-574-88848669

Website: <http://www.yingyaolighting.com>

<http://nbyingyao.en.alibaba.com>

E-mail: service@yingyao.cn